




Guangzhou Wangli Auto Parts Co., Ltd.

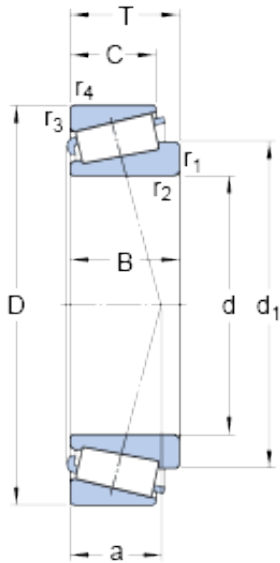

158.75 mm x 205.583 mm x 23.812 mm SKF L
432349/310 tapered roller bearings

Bearing No. L 432349/310

L 432349/310 Bearing 2D drawings and 3D CAD models

Size	205.583x158.75x23.813 mm
Bore Diameter	205,583 mm
Outer Diameter	158,75 mm
Width	23,813 mm
d	158.75 mm
D	205.583 mm
T	23.813 mm
d ₁	182.16 mm
B	23.812 mm
C	18.258 mm
r _{1,2} - min.	1.5 mm
r _{3,4} - min.	1.5 mm
a	33 mm
d _a - max.	172 mm
d _b - min.	167 mm
D _a - min.	194 mm
D _a - max.	197 mm
D _b - min.	197 mm
C _a - min.	5 mm
C _b - min.	5.5 mm
r _a - max.	1.5 mm
r _b - max.	1.5 mm
Basic dynamic load rating - C	138 kN
Basic static load rating - C ₀	280 kN



Guangzhou Wangli Auto Parts Co., Ltd.

Fatigue load limit - P_u	27 kN
Reference speed	3000 r/min
Limiting speed	3000 r/min
Calculation factor - e	0.35
Calculation factor - Y	1.7
Calculation factor - Y_0	0.9
Dimension series	L 432300
d_1	181.5 mm
$r_{1,2}$ min.	1.5 mm
$r_{3,4}$ min.	1.5 mm
d_a max.	172 mm
d_b min.	170 mm
D_a min.	194 mm
D_a max.	195 mm
D_b min.	197 mm
C_a min.	5 mm
C_b min.	5.5 mm
r_a max.	1.5 mm
r_b max.	1.5 mm
Basic dynamic load rating C	168 kN
Basic static load rating C_0	280 kN
Fatigue load limit P_u	27 kN
Calculation factor e	0.37
Calculation factor Y	1.6
Calculation factor Y_0	0.9
Mass bearing	1.95 kg