




Guangzhou Wangli Auto Parts Co., Ltd.

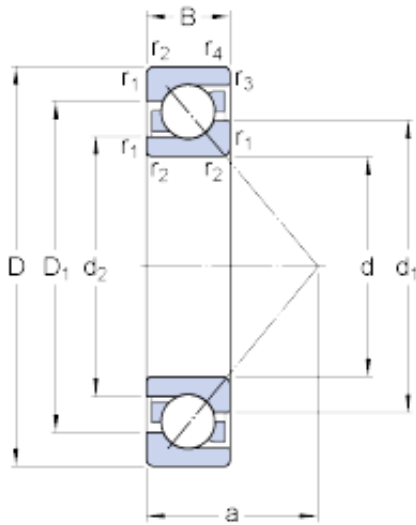

90 mm x 190 mm x 43 mm SKF 7318 BEGAY angular contact ball bearings

Bearing No. 7318 BEGAY

7318 BEGAY Bearing 2D drawings and 3D CAD models

Size	190x90x43 mm
Bore Diameter	190 mm
Outer Diameter	90 mm
Width	43 mm
d	90 mm
D	190 mm
B	43 mm
d ₁	129.2 mm
d ₂	108.97 mm
D ₁	153.1 mm
a	80 mm
r _{1,2} - min.	3 mm
r _{3,4} - min.	1.1 mm
d _a - min.	104 mm
D _a - max.	176 mm
D _b - max.	183 mm
r _a - max.	2.5 mm
r _b - max.	1 mm
Basic dynamic load rating - C	156 kN
Basic static load rating - C ₀	134 kN
Fatigue load limit - P _u	4.8 kN
Reference speed	4000 r/min
Limiting speed	4000 r/min
Calculation factor - k _r	0.1



Guangzhou Wangli Auto Parts Co., Ltd.

Calculation factor - k_a	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	5.23
EAN	7316577065926
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Brass
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Preload	Light
Mounting Arrangement	Universal



Guangzhou Wangli Auto Parts Co., Ltd.

Inch - Metric	Metric
Long Description	90MM Bore; 190MM Outside Diameter; 43MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7318 BEGAY
Weight / LBS	11.508
Outside Diameter	7.48 Inch 190 Millimeter
Width	1.693 Inch 43 Millimeter
Bore	3.543 Inch 90 Millimeter
bore diameter:	90 mm
radial static load capacity:	146 kN
outside diameter:	190 mm
cage material:	Brass
overall width:	43 mm
outer ring width:	43 mm
contact angle:	40 °
maximum rpm:	4000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	2.5 mm



Guangzhou Wangli Auto Parts Co., Ltd.

radial dynamic load capacity:	165 kN
series:	73
d_1	129.2 mm
d_2	108.97 mm
D_1	153.1 mm
$r_{1,2}$ min.	3 mm
$r_{3,4}$ min.	1.1 mm
d_a min.	104 mm
D_a max.	176 mm
D_b max.	183 mm
r_a max.	2.5 mm
r_b max.	1 mm
Basic dynamic load rating C	156 kN
Basic static load rating C_0	134 kN
Fatigue load limit P_u	4.8 kN
Calculation factor A	0.333
Calculation factor k_r	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	5.2 kg