




Guangzhou Wangli Auto Parts Co., Ltd.

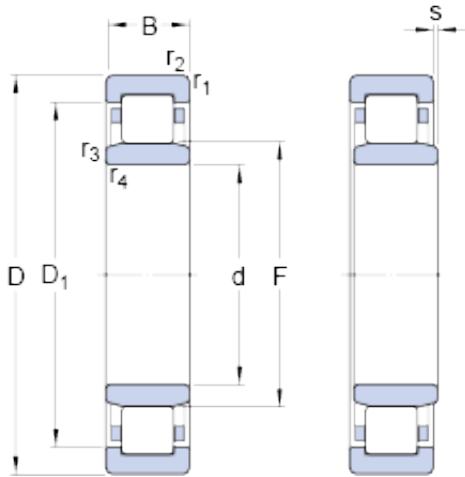

130 mm x 200 mm x 42 mm SKF NU 2026 ECMA thrust ball bearings

Bearing No. NU 2026 ECMA

NU 2026 ECMA Bearing 2D drawings and 3D CAD models

| | |
|---|---------------|
| Size | 200x130x42 mm |
| Bore Diameter | 200 mm |
| Outer Diameter | 130 mm |
| Width | 42 mm |
| d | 130 mm |
| D | 200 mm |
| B | 42 mm |
| D ₁ | 179.1 mm |
| F | 147 mm |
| r _{1,2} - min. | 2 mm |
| r _{3,4} - min. | 1.1 mm |
| s | 3.1 mm |
| d _a - min. | 136 mm |
| d _a - max. | 144 mm |
| d _b - min. | 150 mm |
| D _a - max. | 191 mm |
| r _a - max. | 2 mm |
| r _b - max. | 1 mm |
| Basic dynamic load rating - C | 297 kN |
| Basic static load rating - C ₀ | 440 kN |
| Fatigue load limit - P _u | 51 kN |
| Reference speed | 3200 r/min |
| Limiting speed | 4800 r/min |
| Calculation factor - k _r | 0.15 |
| | |



Guangzhou Wangli Auto Parts Co., Ltd.

| | |
|--------------------------------|----------|
| D_1 | 179.1 mm |
| $r_{1,2}$ min. | 2 mm |
| $r_{3,4}$ min. | 1.1 mm |
| s max. | 3.1 mm |
| d_a min. | 136 mm |
| d_a max. | 144 mm |
| d_b min. | 150 mm |
| D_a max. | 191 mm |
| r_a max. | 2 mm |
| r_b max. | 1 mm |
| Basic dynamic load rating C | 297 kN |
| Basic static load rating C_0 | 440 kN |
| Fatigue load limit P_u | 51 kN |
| Calculation factor k_r | 0.2 |
| Limiting value e | 0.3 |
| Axial load factor Y | 0.4 |
| Mass bearing | 5.06 kg |