




Guangzhou Wangli Auto Parts Co., Ltd.

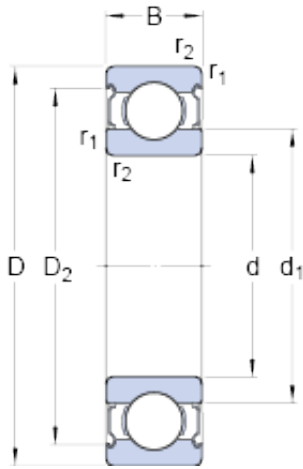

6024-2Z Bearing 2D drawings and 3D CAD models

120 mm x 180 mm x 28 mm SKF 6024-2Z deep groove ball bearings

Bearing No. 6024-2Z

Size	180x120x28 mm
Bore Diameter	180 mm
Outer Diameter	120 mm
Width	28 mm
d	120 mm
D	180 mm
B	28 mm
d ₁	139.05 mm
D ₂	165.3 mm
d _a - min.	129 mm
d _a - max.	139 mm
D _a - max.	171 mm
r _a - max.	2 mm
Basic dynamic load rating - C	88.4 kN
Basic static load rating - C ₀	80 kN
Fatigue load limit - P _u	2.8 kN
Reference speed	7500 r/min
Limiting speed	3800 r/min
Calculation factor - k _r	0.025
Calculation factor - f ₀	15.9
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A



Guangzhou Wangli Auto Parts Co., Ltd.

Weight / Kilogram	2.245
EAN	7316576621628
Product Group	B00308
Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	120MM Bore; 180MM Outside Diameter; 28MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	6024 2Z
Weight / LBS	4.96
Outer Race Width	1.102 Inch 28 Millimeter
Bore	4.724 Inch 120 Millimeter
Outside Diameter	7.087 Inch 180 Millimeter
bore diameter:	120 mm
static load capacity:	80 kN
outside diameter:	180 mm



Guangzhou Wangli Auto Parts Co., Ltd.

precision rating:	ABEC 1 (ISO Class Normal)
overall width:	28 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
outer ring width:	28 mm
row type & fill slot:	Single Row Non-Fill Slot
fillet radius:	2 mm
internal clearance:	C0
maximum rpm:	3800 RPM
dynamic load capacity:	88.4 kN
series:	60
d_1	139.05 mm
D_2	165.3 mm
$r_{1,2}$ min.	2 mm
d_a min.	129 mm
d_a max.	139 mm
D_a max.	171 mm
r_a max.	2 mm
Basic dynamic load rating C	88.4 kN
Basic static load rating C_0	80 kN
Fatigue load limit P_u	2.75 kN
Calculation factor k_r	0.025
Calculation factor f_0	15.9
Mass bearing	2.2 kg